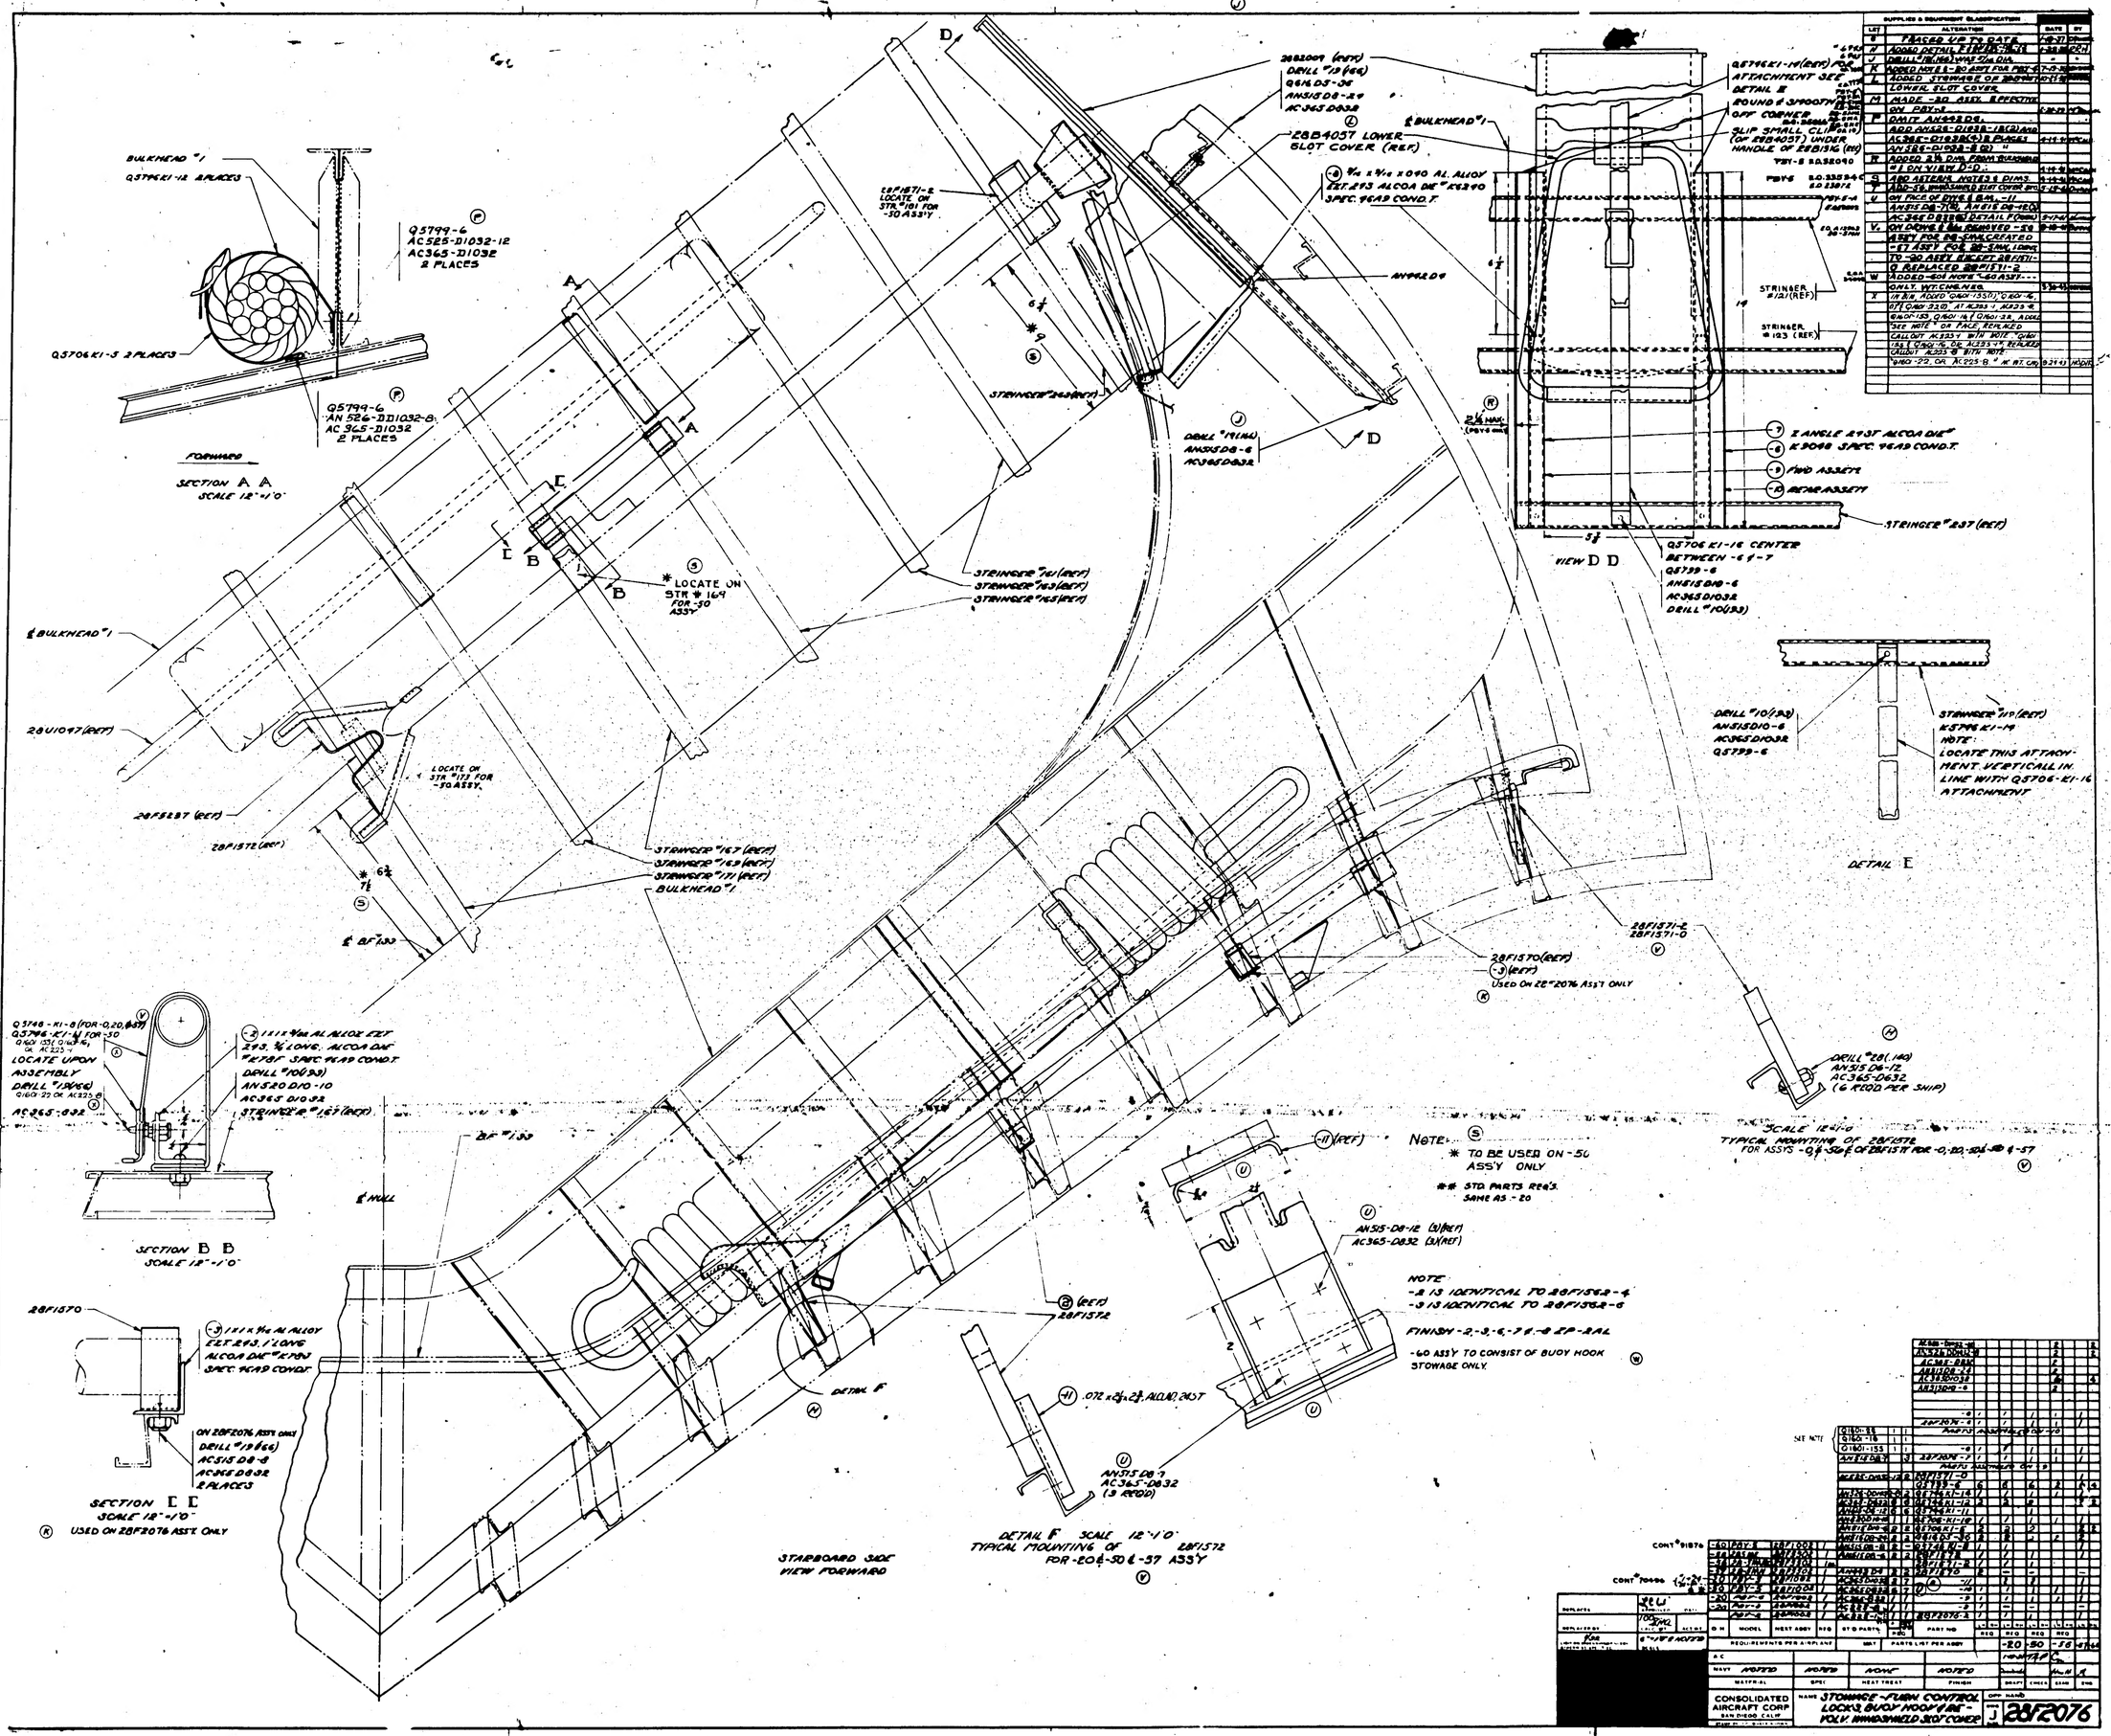
SECTION A A
SCALE 12"=1'0"
FORWARD
BULKHEAD "1
Q5795K1-12 8 PLACES
Q5799-6
AC525-D1032-12
AC365-D1032
2 PLACES
Q5706K1-5 2 PLACES
Q5799-6
AN526-D1032-8
AC365-D1032
2 PLACES
28B4009 (REF)
DRILL "19 (REF)
Q6160-05
ANSI5D8-24
AC365D832
28B4057 LOWER SLOT COVER (REF)
28F1571-2
LOCATE ON STR #101 FOR -30 ASSY
STRINGER #243 (REF)
DRILL "19(.166)
ANSI5D8-6
AC365D832
STRINGER #161 (REF)
STRINGER #163 (REF)
STRINGER #165 (REF)
LOCATE ON STR #169 FOR -30 ASSY
BULKHEAD "1
28U1047 (REF)
LOCATE ON STR #173 FOR -30 ASSY
28F5287 (REF)
28F1572 (REF)
STRINGER #167 (REF)
STRINGER #169 (REF)
STRINGER #171 (REF)
BULKHEAD "1
BF 130
Q5796K1-14 (REF) ATTACHMENT SEE DETAIL E
ROUND & 3/4 OOTY OFF CORNER
SLIP SMALL CLIP (OF 28B4057) UNDER HANDLE OF 28B3116 (REF)
BULKHEAD "1
AN526D8
STRINGER #12 (REF)
STRINGER #193 (REF)
2 ANGLE 2937 ALCOA DIE
K 9048 SPEC. 9EAB COND.T.
F/WD ASSY'S
REAR ASSY'S
STRINGER #237 (REF)
Q5706K1-16 CENTER BETWEEN -6 & -7
Q5799-6
ANSI5D8-6
AC365D1032
DRILL "10(.193)
VIEW D D
DRILL "10(.193)
ANSI5D10-6
AC365D1032
Q5799-6
STRINGER #19 (REF)
K5796K1-14
NOTE:
LOCATE THIS ATTACHMENT VERTICALLY IN LINE WITH Q5706-K1-16 ATTACHMENT
DETAIL E
28F1571-2
28F1571-0
28F1570 (REF)
(-3) (REF)
USED ON 28*2076 ASS'Y ONLY
DRILL #28(.140)
AN515D6-12
AC365-D632
(6 REQD PER SHIP)
SCALE 12"=1'0"
TYPICAL MOUNTING OF 28F1572 FOR ASSY'S -0 & -30 & OF 28F1571 FOR -0, -20, -30 & -57
Q5748-K1-8 (FOR -0, 20, 8 ASS'Y)
Q5796-K1-4 (FOR -30)
LOCATE UPON ASSEMBLY
DRILL "7(.196)
AC365-632
(-2) 1x1x3/16 AL ALLOY EXT. 243, 3/4 LONG, ALCOA DIE #2737 SPEC. 9EAB COND.T.
DRILL "10(.193)
AN520D10-10
AC365D1032
STRINGER #167 (REF)
SECTION B B
SCALE 12"=1'0"
BF 130
℄ HULL
(11) (REF)
NOTE:
* TO BE USED ON -50 ASS'Y ONLY
** STD. PARTS REQ'D. SAME AS -20
AN515-D8-12 (3) (REF)
AC365-D832 (3) (REF)
NOTE
-2 IS IDENTICAL TO 28F1562-4
-3 IS IDENTICAL TO 28F1562-6
FINISH -2, -3, -6, -7 & -8 ZP-2AL
-60 ASSY TO CONSIST OF BUOY HOOK STOWAGE ONLY.
28F1570
(-3) 1x1x3/16 AL ALLOY EXT. 243, 1 LONG ALCOA DIE #2737 SPEC. 9EAB COND.T.
ON 28F2076 ASS'Y ONLY
DRILL "19(.166)
AC515D8-8
AC365D832
2 PLACES
SECTION E E
SCALE 12"=1'0"
USED ON 28F2076 ASS'Y ONLY
(2) (REF)
28F1572
DETAIL F
(11) .072 x 2 1/4 x 2 1/2 ALCLAD 2017
AN515D8-3
AC365-D832
(3 REQD)
DETAIL F SCALE 12"=1'0"
TYPICAL MOUNTING OF 28F1572 FOR -20 & -50 & -57 ASS'Y
STARBOARD SIDE VIEW FORWARD
SUPPLIES & EQUIPMENT CLASSIFICATION
LOT | ALTERATIONS | DATE | BY
G | PLACED UP TO DATE
H | ADDED DETAIL F
J | DRILL 19(.166) 1/4x3/4 DIA.
K | ADDED NOTE E-20 ASS'Y FOR 28F-57-20
L | ADDED STOWAGE OF 28B4057
LOWER SLOT COVER
M | MADE -20 ASSY. REFERENCE ON 28F2
P | OMIT AN442D8.
ADD AN526-D1032-1(RC) AND AC365C-D1032(RC) 3 PLACES
SH 284-D1032-8 (2) "
R | ADDED 2 1/4 DIM. FROM BULKHEAD #1 ON VIEW D-D.
S | ADD ALTERNATE NOTES & DIMS.
T | ADD -50 ASSEMBLY & SLOT COVER
U | ON FACE OF DWG & BILL -11
ANSI5D8-3 TO ANSI5D8-12
AC365D832 DETAIL F (DWG)
V | ON DRWG & BILL REMOVED -58
ASSY FOR 28-5MIL CREATED
-57 ASS'Y FOR 28-5MIL COMP.
TO -50 ASS'Y EXCEPT 28F1571-
Q REPLACED 28F1571-2
W | ADDED -60 NOTE "-60 ASSY---
ONLY. WITCHENEG.
X | IN B.M. ADDED Q160-1551 & Q160-16
OF Q160 2310 AT AL2353-1, AL223-8
& Q160-155 Q160-16 & Q160-22 ADDED
"SEE NOTE" ON FACE REVISED
CALLOUT AL2237 W/H NOTE "Q160
155 & Q160-16 OR AL2237-7" REVISED
CALLOUT AL223-8 W/H NOTE
"Q160-22 OR AL223-8" AT BT. CHG
CONSOLIDATED AIRCRAFT CORP SAN DIEGO, CALIF.
NAME STOWAGE-FLASH CONTROL LOCKS, BUOY HOOK & BRACKET - VOLV. WINDSHIELD 310° CONVER
DWG NO. 28F2076
H 289
28F2076